

Specifications

All Bertolini Chairs feature:

The industry's strongest frame crafted from 16 gauge 1010 cold-rolled carbon steel tubing 30% stronger than typical 18 gauge used by other manufacturers. The integrated Solid Flex-Action Torsion Bar System effectively disperses vibration away from the critical weld points while the extra-generous tube radius provides an additional 6% strength.

Glides for life: Noncorrosive ribbed and booted self-leveling rocker glides which eliminate swivel-glide failure; provided for the life of your chair.


Over 50 standard fabrics and hundreds of designer fabrics to choose from. C.O.M. fabrics are usable upon approval; allow 0.8 to 1.1 yards of standard width fabric depending on model.

Ultra-Durable Powder-coat electrostatically applied and baked at over 400 degrees. Saltwater tested to over 800 hours. Both standard and designer finishes available. Chrome and brass plating also available.

Stack buttons: Friction-fit, non-rigid polymer stack buttons stay in place, preventing marring.

Extensive Internal and Independent Testing: Exceeds all BIFMA standards (and a few that BIFMA has not thought of).

Warranty: 10 year components on all chairs. 20 year structural on Titan ZM, Titan LM, Impressions and Savannah models. 12 year Structural on all Postureflex models.

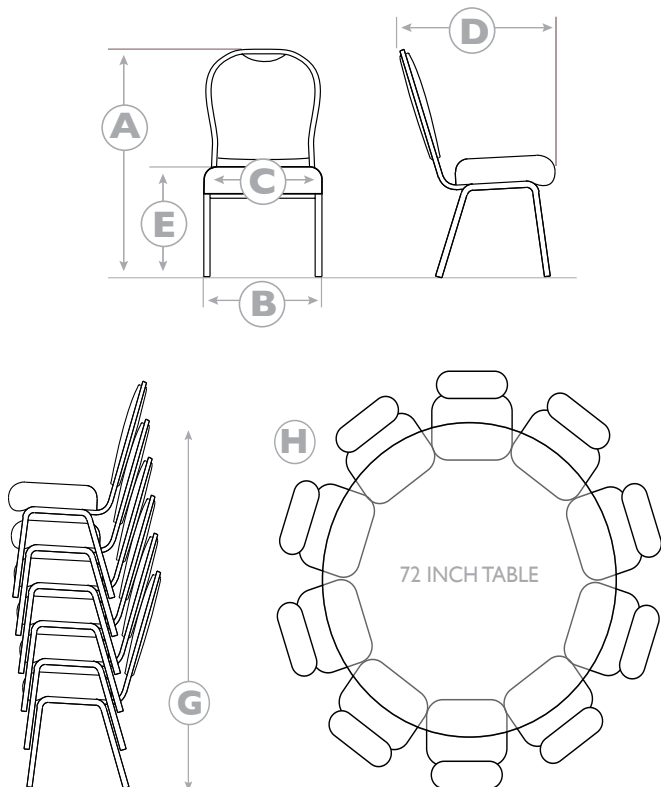

SPECIFICATIONS

CHAIR STYLE	CHAIR MODEL NO.	WEIGHT (LBS.)	HEIGHT (IN.) A	CHAIR WIDTH (IN.) B	SEAT WIDTH (IN.) C	CHAIR DEPTH (IN.) D	SEAT HEIGHT (IN.) E	C.O.M. REQUIREMENT (YD.)	STACKABILITY G	TABLE ROUND 72" H
POSTUREFLEX TITAN VBE	VBE 91660	19.0	35.5	18.0	16.0	22.0	19.0	1.1	7-8	10-12
	VBE 91860	18.4	35.5	18.0	18.0	22.0	19.0	1.1	5-6	10-12
	VBE 91661	18.3	35.5	18.0	16.0	22.0	19.0	1.1	7-8	10-12
	VBE 91861	17.7	35.5	18.0	18.0	22.0	19.0	1.1	5-6	10-12
	VBE 91662	17.8	35.0	18.0	16.0	22.0	19.0	1.0	7-8	10-12
	VBE 91862	17.2	35.0	18.0	18.0	22.0	19.0	1.0	5-6	10-12
	VBE 91663	19.0	35.5	18.0	16.0	22.0	19.0	1.1	7-8	10-12
	VBE 91683	18.4	35.5	18.0	18.0	22.0	19.0	1.1	5-6	10-12
	VBE 91664	19.0	36.5	18.0	16.0	22.0	19.0	1.1	7-8	10-12
	VBE 91864	18.4	36.5	18.0	18.0	22.0	19.0	1.1	5-6	10-12
VBE 91665	18.2	36.5	18.0	16.0	22.0	19.0	1.1	7-8	10-12	
VBE 91865	17.6	36.5	18.0	18.0	22.0	19.0	1.1	5-6	10-12	
POSTUREFLEX TITAN SFB	SFB 91680	19.6	35.5	18.0	16.0	22.0	19.0	1.1	7-8	10-12
	SFB 91880	19.0	35.5	18.0	18.0	22.0	19.0	1.1	7-8	10-12
	SFB 91682	18.8	35.0	18.0	16.0	22.0	19.0	1.0	7-8	10-12
	SFB 91882	18.2	35.0	18.0	18.0	22.0	19.0	1.0	7-8	10-12
	SFB 91683	19.6	35.5	18.0	16.0	22.0	19.0	1.1	7-8	10-12
	SFB 91883	19.0	35.5	18.0	18.0	22.0	19.0	1.1	7-8	10-12
	SFB 91684	19.2	36.0	18.0	16.0	22.0	19.0	1.1	7-8	10-12
	SFB 91884	18.6	36.0	18.0	18.0	22.0	19.0	1.1	7-8	10-12
	SFB 91686	19.1	35.5	18.0	16.0	22.0	19.0	1.0	7-8	10-12
	SFB 91886	18.5	35.5	18.0	18.0	22.0	19.0	1.0	7-8	10-12
SFB 91688	19.4	35.5	18.0	16.0	22.0	19.0	1.0	7-8	10-12	
SFB 91888	18.8	35.5	18.0	18.0	22.0	19.0	1.0	7-8	8-10	
POSTUREFLEX TITAN UE	UE 91670	17.9	36.0	18.0	16.0	22.0	19.0	1.1	7-8	10-12
	UE 91870	17.3	36.0	18.0	18.0	22.0	19.0	1.1	5-6	10-12
	UE 91676	17.6	36.5	18.0	16.0	22.0	19.0	1.1	7-8	10-12
	UE 91876	17.0	36.5	18.0	18.0	22.0	19.0	1.1	5-6	10-12
	UE 91677	17.6	35.0	18.0	16.0	22.0	19.0	1.1	7-8	10-12
	UE 91877	17.0	36.0	18.0	18.0	22.0	19.0	1.1	5-6	10-12
	UE 91679	18.0	36.0	18.0	16.0	22.0	19.0	1.1	7-8	10-12
	UE 91879	17.4	36.0	18.0	18.0	22.0	19.0	1.1	5-6	10-12
TITAN LM	LM 81600	16.2	36.5	18.0	16.0	23.0	19.0	0.9	8-10	10-12
	LM 81800	15.6	36.5	18.0	18.0	23.0	19.0	0.9	6-8	10-12
	LM 81602	15.6	36.0	18.0	16.0	23.0	19.0	0.8	8-10	10-12
	LM 81802	15.0	36.0	18.0	18.0	23.0	19.0	0.8	6-8	10-12
	LM 81604	16.5	35.5	18.0	16.0	23.0	19.0	0.9	8-10	10-12
	LM 81804	15.9	35.5	18.0	18.0	23.0	19.0	0.9	6-8	10-12
	LM 81606	16.1	36.0	18.0	16.0	24.0	19.0	0.9	8-10	10-12
	LM 81806	15.5	36.0	18.0	18.0	24.0	19.0	0.9	6-8	10-12
TITAN ZM	ZM 91610	17.8	36.5	18.0	16.0	23.0	19.0	1.0	8-10	10-12
	ZM 91810	17.2	36.5	18.0	18.0	23.0	19.0	1.0	6-8	10-12
	ZM 91612	17.1	36.0	18.0	16.0	23.0	19.0	0.8	8-10	10-12
	ZM 91812	16.5	36.0	18.0	18.0	23.0	19.0	0.8	6-8	10-12
	ZM 91613	17.5	36.5	18.0	16.0	23.0	19.0	1.0	8-10	10-12
	ZM 91813	16.9	36.5	18.0	18.0	23.0	19.0	1.0	6-8	10-12
IMPRESSIONS 7025	16.6	35.5	20.0	20.0	26.0	18.5	1.1	6-8	8-10	
IMPRESSIONS 7015	15.8	35.5	20.0	20.0	26.0	18.5	1.1	6-8	8-10	
IMPRESSIONS 7005	16.8	35.5	20.0	20.0	26.0	18.5	1.1	6-8	8-10	
SAVANNAH 5010	17.1	36.0	20.0	20.0	26.0	18.5	1.1	6-8	8-10	
SAVANNAH 5003	16.6	36.0	20.0	20.0	26.0	18.5	1.1	6-8	8-10	